

Ductile Iron Tees - Spigot End

Technical Guide W3.5

The Gillies range of ductile iron fittings are manufactured to the highest industry standards and have a proven performance record in New Zealand.



Applications

Potable water and wastewater pipelines
 Water reticulation and irrigation
 Water supply maintenance
 Subdivisions
 Pump stations

Product Attributes

High-strength ductile iron construction
 Bureau Veritos S Mark accredited
 Plascoat coated
 Installed above and below ground

Approvals/Standards

Approved to AS/NZ 2280 Standard
 Coating complies with AS/NZS 4158 and 4020. (WSAA Product Appraisal 05/12)

Quality

ISO 9001:2008 Quality Management Standard

We are the supply partner of choice for New Zealand's civil construction industry, specialising in water and infrastructure based solutions.

The Gillies range of ductile iron fittings are manufactured to the highest industry standards and have a proven performance record in New Zealand.

Design Specifications

- Sizes available from 80 - 600mm
- Operating pressure up to 1600kPA as standard. Higher pressures available.
- Suitable for in-ground and above ground applications
- All fittings have a plascoat coating for superior protection

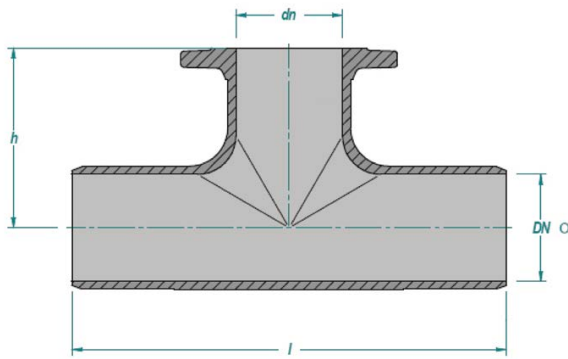


FIG. 1 TEE SPIG-SPIG-FLG

TABLE 1 Dimensions

Nominal Size		h (mm)	l (mm)
DN (mm)	dn (mm)		
100	80	178	432
100	100	178	432
150	80	203	432
150	100	203	432
150	150	203	432
200	80	241	457
200	100	241	457
200	150	241	482
200	200	241	534
250	80	267	457
250	100	267	457
250	150	267	534
250	200	267	558
250	225	267	558
250	250	267	610
300	80	305	457
300	100	305	457
300	150	305	610
300	200	305	636
375	80	305	559
375	100	305	559
375	200	356	736
375	250	356	736
375	300	356	736
375	375	356	812
450	80	343	559
450	100	343	559
450	250	394	812
500	80	381	584
500	100	381	584
500	250	432	888
500	300	432	888
600	80	432	584
600	100	432	584
600	300	483	990
600	375	495	1042

Branches Nationwide Support Office & Technical Services 0800 93 7473

Disclaimer: While every effort has been made to ensure that the information in this document is correct and accurate, users of Hynds product or information within this document must make their own assessment of suitability for their particular application. Product dimensions are nominal only, and should be verified if critical to a particular installation. No warranty is either expressed, implied, or statutory made by Hynds unless expressly stated in any sale and purchase agreement entered into between Hynds and the user.